


## HYTECH “DIVE GUARD II” 2 DIVER CONTROL PANEL

This is a 2 diver surface control panel, designed to military specifications and complying with the rules and regulations of Lloyds Register of Shipping.

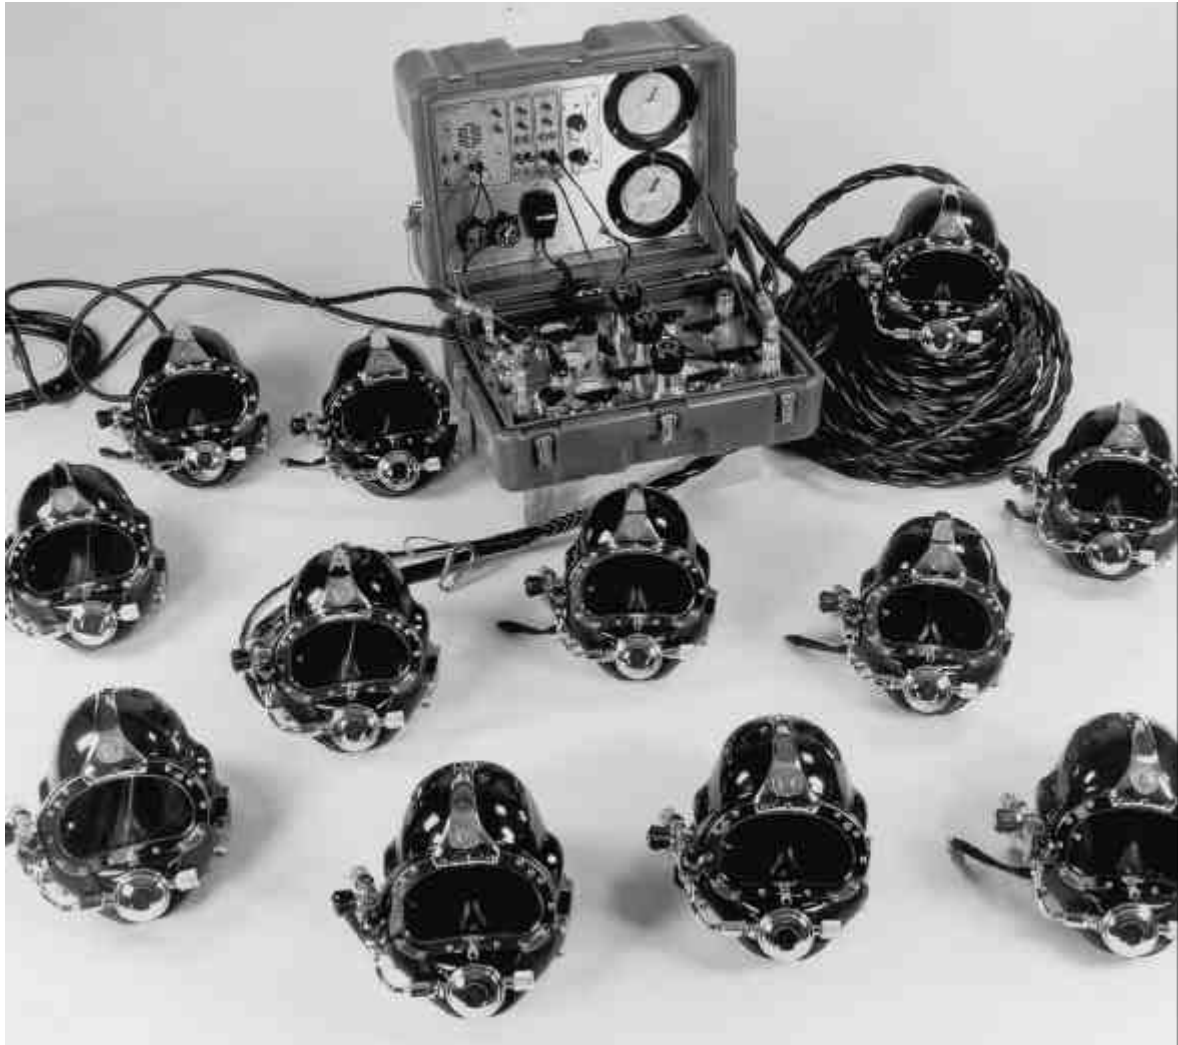

The control panel is built in a heavy duty, waterproof ABS transport case, and consisting off the following main items:

- 2 x HP air inlet points (225 bar max.)
- 1 x LP air inlet point (18 bar max.)
- HP and LP pressure gauges, with blow out disc and safety glass
- 2 x Hytech highflow HP air reducers preset from 225 bar-35 bar
- 3 x Hytech highflow medium pressure, air reducers hand adjustable from 18-6 Bar (2 x in HP supply line, 1 x in LP supply line)
- 4 x Cross over valves
- 2 x Divers pneumo depth gauges 0-70 msw, 0,25% accuracy
- 1 x 2 Diver communication system Amcon 2825
- Stopwatch clock



## HYTECH "DIVE GUARD II" 2 DIVER CONTROL PANEL

The divers control panel is mounted in the bottom section of the control panel, and the communication system and depth gauges are mounted in the lid.

Summary of equipment used in Dive Guard II panel:

- Stainless steel front panels with engraved diagrams and texts
- Hytech pressure master high flow non freezing HP preset reducers
- Hytech pressure master high flow non freezing MP adjustable reducers
- Hytech manifolds, with integrated check valves
- Foundrometer depth gauges 0,25%, accuracy Ø6"
- Tungum tubing
- Parker Hannifin fittings and valves
- Whitey valves
- Amron 2825 communication module with rechargeable batteries

**ORDER NUMBER 3.80.324**

